

M.C.E. TECHNIK S.R.L.

Via Dante, 22

35030 Caselle di Selvazzano

PD

P.I. 00995980281


Cod.Fisc 00995980281

Tel. 049-631332

Tel. / Fax 049-630155

E-mail info@mcetechnik.it

Scheda Articolo

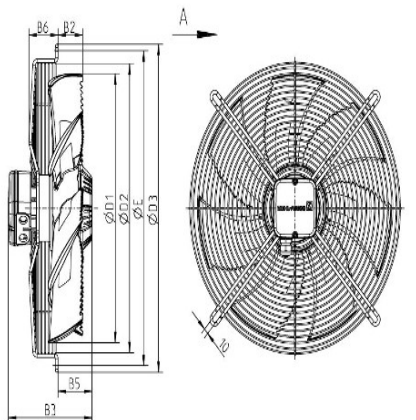

L-KL-2748

Codice	Descrizione	U.M.	Listino
062935	VENT. ASSIALE D. 350 FC035-4EQ.2C.A7 230V PREMENTE 1370g 2660m3/h 0.16KW impregnato uso agricolo con quadro	NR	2550.00

Dettagli Articolo

Peso Articolo 7.500

VENTILATORE ASSIALE ZIEHL-ABEGG AXIAL FAN / AXIALVENTILATOREN

Modello impregnato ad alta resistenza

153932 FC035-4EQ.2C.A7

Axial fan with diecast blades and with rectangular wall ring plate.

Type:FC035-4EQ.2C.A7

1~ 230V ±10% D 50Hz P1 160W 0,75A DI=30% 1370rpm 8uF/230V VP 2660M3/H D P/FA 50Pa 70°C

IP54 THCL 155 Special impregnation HV.

Steinmetz

ErP conform 2015 N=42,6 statA=31,2%

Terminal box K05 Mounted on Stator. Capacitor included in the terminal box. wiring diagram: 1360-123XB Rating plate: 1x fixed

Fitting position H/Vo.

Motor protection: thermal contact minimal operating temperature -25 degree Condensation drain hole rotor closed.

ball bearing with long-time lubrication.

blades made of aluminium.

Fan 2 coat paint RAL 9005 (jet black) resistance class 3 (L-TI-0596)

Safety guard powder-coated resistance class 3 (L-TI-0585) RAL 9005 (jet black).

All connecting elements in stainless steel.

Guard grill mounted on suction side termine di consegna prevista : 9 Settimana(e)

Commodity code: 8414 59 25

Stein metz misure.

ingombri esterni quadro 485mm misure

interasse fori fissaggio = 435mm foro 4mm

diametro ventola = 350mm

diametro bocchaglio = 367mm s

pessore assiale quadro = 24mm

sporgenza interna = 75mm

sporgenza esterna = 10mm

ingombro assiale completo = 114mm

MODELLO BASE SEMZA IMPREGNAZIONE A BASSA DURATA

MODELLO FC035-4EQ.2C.A7 CODICE ZIEHL = 141212

Ventilatore assiale con griglia e bocchaglio alto, completo di quadro idoneo all'uso nel settore zootecnico / agricolo.

Versione a 4 poli monofase premente, doppia verniciatura nera ral9005 e completo di scatola di derivazione integrata e viteria in inox.
caratteristiche elettriche 1*230v 50hz 0.16kw 0.75A 1370giri cond. 8uF/400V
portata 2660m3/h a 50PA protezione IP54 classe termica 155°C F
