M.C.E. TECHNIK S.R.L.
Via Dante, 22
35030 Caselle di Selvazzano PD
P.I. 00995980281 Cod.Fisc 00995980281
Tel. 049-631332 Tel. / Fax 049-630155
E-mail info@mcetechnik.it

Scheda Articolo



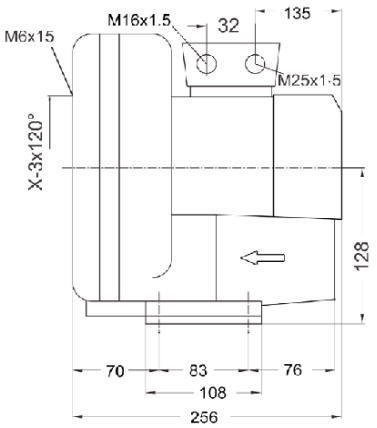

Codice	Descrizione	U.M.	Listino
715062	SOFFIANTE 1 CANALE SC401T 400V 1.30KW uscita da 1-1/2 pollici con pt (I.VA.CO) IE2 ATEX 3GD	NR	935.55

Dettagli Articolo

Peso Articolo 16.000

Soffiante,1 stadio, kW 1.3
V230-400/3/50-60Hz IE2 2P ATEX 3GD IP65
II 3G Ex nA IIC T4 Gc
II 3G Ex h IIC T4 Gc
II 3D Ex tc IIIC T135°C Dc IP65
II 3D Ex h IIIC T135°C Dc
SC401MF0.85T-IE2 - SC401MF0.85M - SC401MF0.85M-12 - SC401MF1.3T-IE2 SC401MF1.3M - SC401MF1.3M-12
Costruiti secondo il principio dei canali laterali, funzionano sia in aspirazione sia in compressione e sono progettati per la vorare a servizio continuo. Realizzato in alluminio pressofuso garantisce la massima robustezza e maneggevolezza. Non occorre lubrificazione in quanto non c'è contatto tra le parti statiche e rotanti.
Particolari silenziatori contribuiscono ad ottenere un elevato livello di silenziosità.
Construction of the ring blowers fans is based on the lateral ducts principle. The blowers can operate as either exhaust or compression fans and are designed for continuous service. The device is assembled directly on the
motor shaft; all the rotating parts are dynamically balanced to ensure absolute absence of vibration. Full die-cast aluminium construction for maximum sturdiness and ease of handling.